

LogiLink®



Wireless Thermo Hygrometer

Art. No.: SC0116

Maintain Healthy Indoor Air Quality

Remotely monitor the temperature and humidity in your wine cellar, fruit cellar, server room, greenhouse or home by using Smart Life app wherever you are. Giving you convenience and peace of mind.



Android



Support



WiFi 2.4GHz




Push Notifications



Display




Wall Mountable

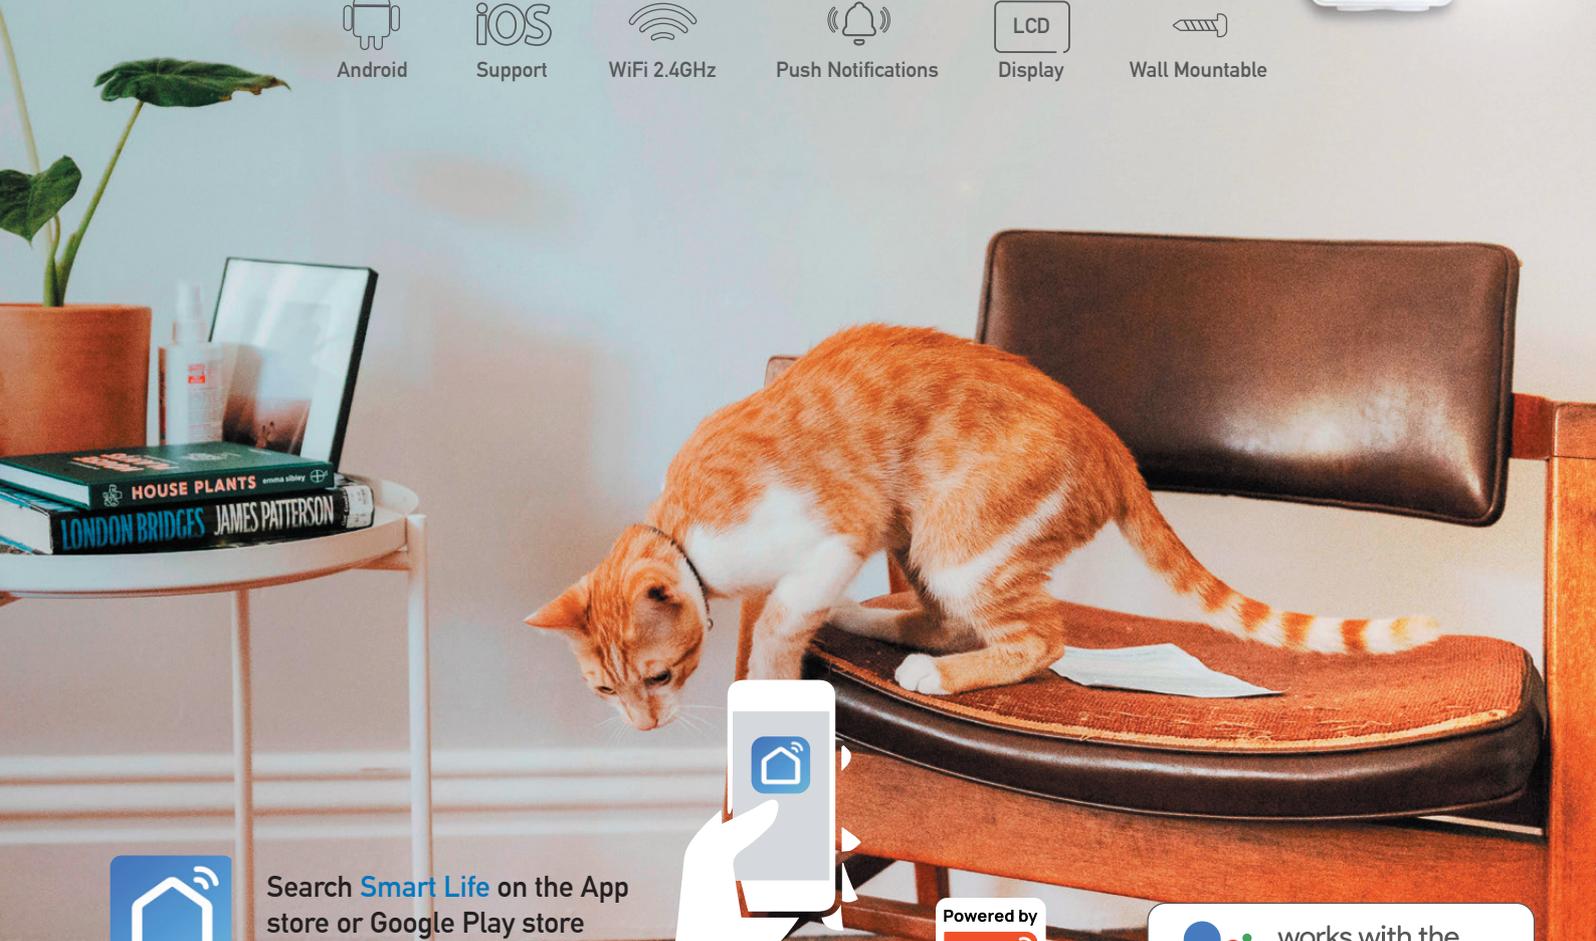

Smart Life



Search **Smart Life** on the App store or Google Play store



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

Remote Wi-Fi Monitoring

The thermo Hygrometer can be controlled through your existing Wi-Fi network via the free Smart Life app. Easily monitor temperature and humidity data on your smartphone and keep an eye on your house when you're away from home.

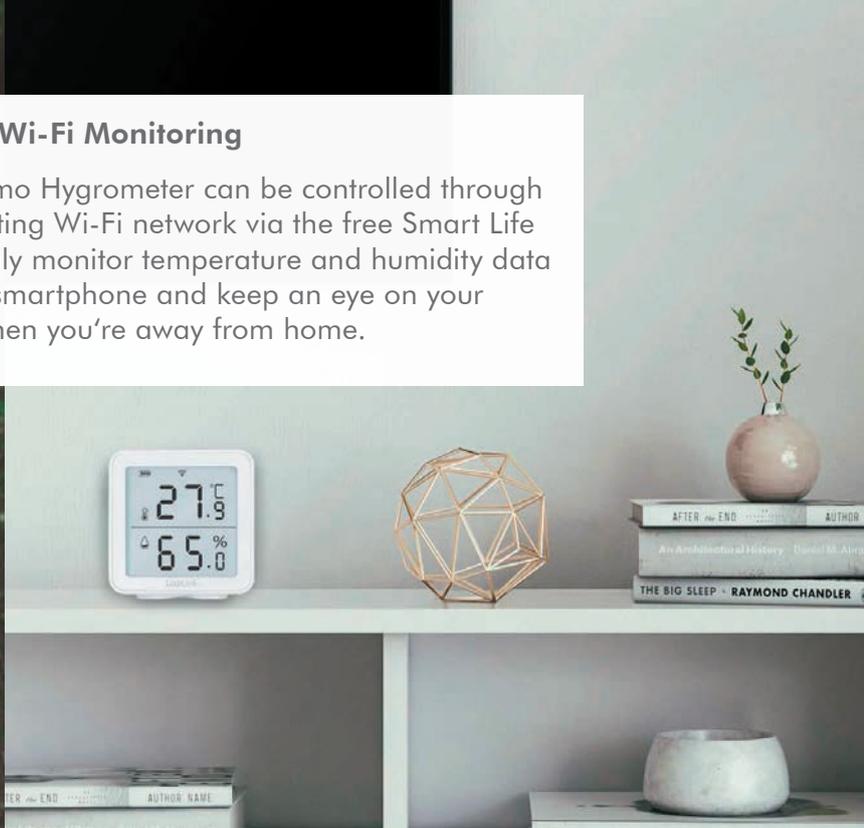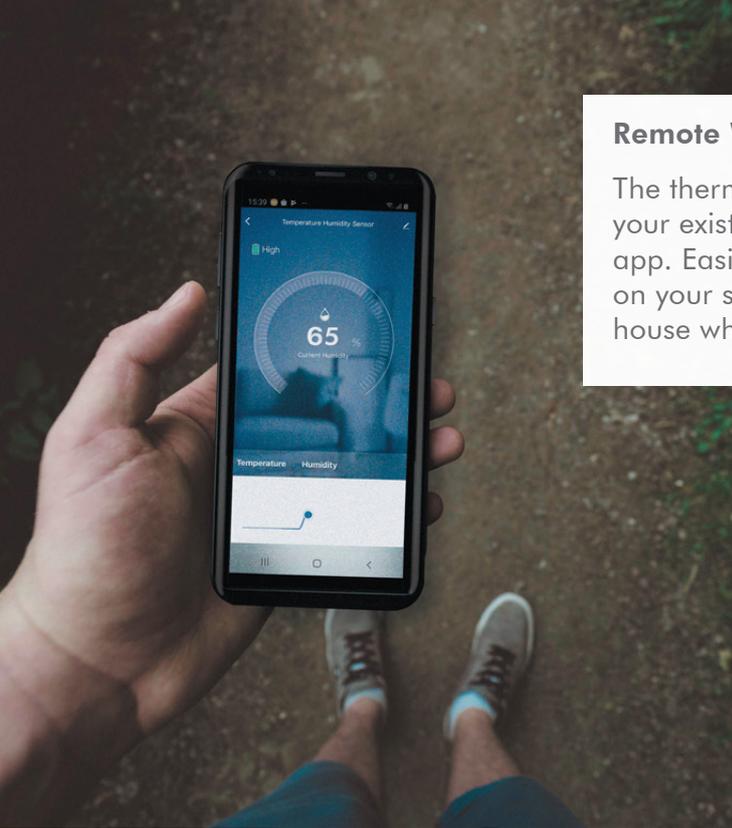

Instant Notifications


With the Smart Life app, you can create preset temperature and humidity levels. If the temp/humidity changes, you'll receive a notification instantly from your smartphone, no matter where you are.

Higher Accuracy You Can Trust

With a built-in Swiss-made sensor, temperature and humidity reading are accurate to $\pm 0,5^{\circ}\text{C}$ and $\pm 5\%$ RH. Being able to identify trends, obtain valuable information, and maintain high air quality; it's ideal to prevent growth of mold and bacteria as well as alleviate physical discomfort.

Keep Your Hands-Free

Enjoy the convenience of hands-free by using simple voice commands with Amazon Alexa or Google Assistant.

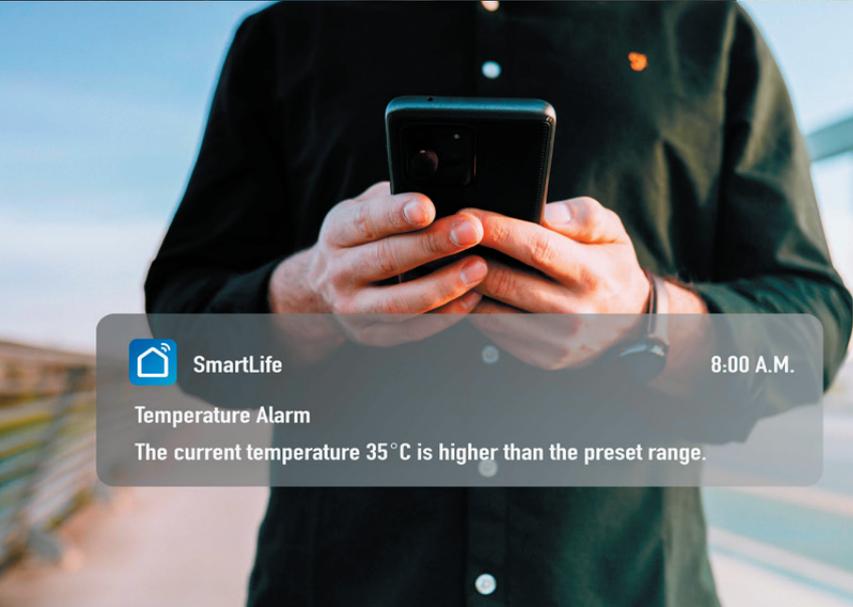

WORKS WITH
amazon alexa

works with the
Google Assistant



Ideal for maintaining optimal temperature and humidity in wine cellars, server rooms and greenhouses.

Specifications:

Wi-Fi Standard	802.11b/g/n
Frequency Range	2.412–2.484 MHz
Max. Transmission Power	100 mW
Power Source	3x AA batteries
Working Distance	70 m (no obstructions)
Working Voltage	4,5 V
Standby Current	≤35 uA
Working Current	≤250 mA
Temperature Tolerance	±0,5°C
Humidity Tolerance	±5% RH
LCD Display Status	Power, Wifi Signal, Temperature, Humidity
Low Power Indication	Yes
Operating Temperature	-10–55°C
Operating Humidity	0–99,9% RH
Storage Temperature	-25–55°C
Storage Humidity	0–93% RH
Temperature Detect Range	-10–55°C
Humidity Detect Range	0–100% RH
Screen Dimensions	5,48x5,36 cm
Reset Button	Yes
Standby Power Consumption	0,18 mW
Max. Power Consumption	900 mW
Housing Material	ABS, PC
Dimensions	6,4x6,4x2,8 cm
Weight	72 g (without battery)

Package Contents:

- » 1x Wireless Thermo Hygrometer
- » 1x Mounting Screw
- » 1x User Manual

Package Information:

- » Packing Dimension: 68x68x50 mm
- » Packing Weight: 0,1 kg
- » Carton Dimension: 265x275x230 mm
- » Carton Q'ty: 75 pcs
- » Carton Weight: 6,5 kg



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.





EC-Declaration of Conformity

According to the regulations
2014/53/EU (RED) & 2015/863/EU (RoHS3)

We, Importer / Distributor

2direct GmbH
Langenstück 5
58579 Schalksmühle
Germany

Declare that the product

Brand Name: **LogiLink**
Model Number: SC0116
Temperature and Humidity Detector

Is in Conformity with the following European Standards:


EN 62311:2008
EN 62368-1:2014+A11:2017
EN 61000-6-3:2007
EN 50130-4:2011+A1:2014
EN 301 489-1: V2.2.3
EN 301 489-17: V3.1.1
EN 300 328: V2.2.2
EN 63000: 2018

Report No: WTS20S12100783Y, WTS20S12100730E, WTS20S12100705W001,
WTS20S12100705W002, WTS20S12100705W003

Identification of signatory empowered to bind the manufacturer or his authorized
representative.

Schalksmühle, 2nd November 2021

Place and date of issue



2direct GmbH
Langenstück 5

Signature (Wilfried Gröhnert)

Tel.: +49-2351-66887-0
Fax: +49-2351-66887-29