



EDIFIER M90



GTM DECK

● Version 1.1 2026/03/17

CONTENTS

EDIFIER M90

Colors	P3
---------------	-----------

Dimensions	P4
-------------------	-----------

Selling Points	P5
-----------------------	-----------

Benchmark	P6
------------------	-----------

Key Features	P10
---------------------	------------

Mobile App	P11
-------------------	------------

Packaging	P12
------------------	------------

Scenarios	P13
------------------	------------

Roadmap	P15
----------------	------------

Colors

EDIFIER M90




● Black



● White


Dimensions

EDIFIER M90

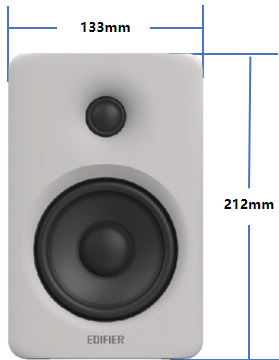

133mm x 212mm x 225mm

M90

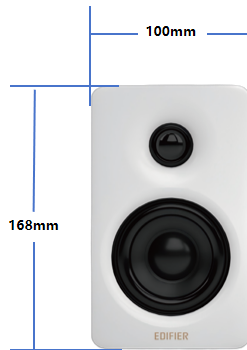

100mm x 168mm x 147mm

M60

Selling Points

EDIFIER M90



Bi-amped 2.0 speaker with high-quality sound and versatile connectivity



- 100W (35W x 2 + 15W x 2) RMS total output power



- 4" long-throw aluminum diaphragm mid-bass drivers and 1" silk dome tweeters



- End-to-end digital signal process supporting 24-bit/96kHz hi-resolution audio
- Bi-amped active crossover and dynamic range control, reproducing balanced sound and smooth frequency crossover



- Hi-Res Audio certified
- Hi-Res Audio Wireless certified



- Versatile connectivity options including HDMI eARC, Optical, USB-C, and AUX
- SUB OUT port for external subwoofer connection



- Bluetooth V6.0 supporting multi-point connection and LDAC codec



- Rear knob for source selection, volume control, and power-on/off
- 2.4GHz remote control included
- Supports EDIFIER ConneX mobile app



- Three preset sound effects
- Supports 9-band EQ customization by the app

Benchmark

EDIFIER M90

Items	EDIFIER M90	EDIFIER M60
Product Image		
Bluetooth Version	V6.0	V5.3
Multi-point Connection	Yes	No
Codecs	SBC, LDAC	SBC, LDAC
Controls	Power knob (Volume +/-, Source switch) Remote control (2.4GHz)	Touch panel (Power / Source switch, Volume +/-)
Enclosure	MDF	MDF
Dimensions (W x H x D)	133x212x225mm (Right speaker) 133x212x210mm (Left speaker)	100mm x 168mm x 147mm (Per speaker)
Mobile App	EDIFIER ConneX App	EDIFIER ConneX App

Benchmark

EDIFIER M90

Items	EDIFIER M90	Audioengine A5+
Product Image		
Bluetooth Version	V6.0	N/A
Multi-point Connection	Yes	N/A
Codecs	SBC, LDAC	N/A
Controls	Power knob (Volume +/-, Source switch) Remote control (2.4GHz)	Volume +/- Remote control (iR)
Enclosure	MDF	MDF
Dimensions (W x H x D)	133x212x225mm (Right speaker) 133x212x210mm (Left speaker)	180mm x 270mm x 200mm (Per speaker)
Mobile App	EDIFIER ConneX App	No

Key Features

EDIFIER M90

Bi-amped 2.0 speaker with high-quality sound and versatile connectivity

Powerful Sound Performance

- 100W RMS total output power
- 4" long-throw aluminum diaphragm mid-bass drivers
- Driven by two high-efficiency Class D amplifiers

High-resolution Audio Reproduction

- End-to-end digital signal process supporting 24-bit/96kHz hi-resolution audio
- Hi-Res Audio and Hi-Res Audio Wireless certified


Versatile Connectivity Options

- HDMI eARC, Optical, USB-C, and AUX inputs
- Bluetooth V6.0 supporting multi-point connection
- SUB OUT port for external subwoofer connection




Mobile App


EDIFIER ConneX




Playback control



Sound effect switch



Sound effect customization



Manual and settings

Packaging

EDIFIER M90



Carton Configuration

Product Weight	Around 6.05kg (Net weight: Speaker)
Product Size (L*W*H)	133x225x212mm (Right speaker) 133x210x212mm (Left speaker)
Inner Carton	385x292x322mm (L*W*H), 8.11 kg (Gross weight)
Master Carton	403x309x345mm (L*W*H), 8.75 kg (Gross weight)
PCS/CTN	1 PC

Package Content



Items	Quantity
M90	1
Power Cord (1.8m)	1
Speaker Connecting Cable (5m)	1
Fiber Optic Audio Cable (1.5m)	1
USB-C to USB-C Cable (1.2m)	1
3.5mm-to-RCA Audio Cable (1.7m)	1
3.5mm-to-3.5mm Audio Cable (1.7m)	1
Remote Control	1
AAA Battery	2
Quick Start Guide	1
Important Safety Instructions	1

EAN Codes

Color Options	EAN Codes
Black	6923520217199
White	6923520217205

Scenarios

EDIFIER M90

EDIFIER



Scenarios

EDIFIER M90





EDIFIER

A Passion for Sound

www.edifier.com

EDIFIER



EU DECLARATION OF CONFORMITY

1. Model No., trademark:

Trademark	EDIFIER
Model Name	EDF100120, EDF920001

2. Name and address of the manufacturer:

Name of the manufacturer	Edifier International Limited
Address	P.O. Box 6264 General Post Office, Hong Kong

3. This declaration of conformity is issued under the sole responsibility of the manufacturer.

4. Object of the declaration:

Product Name	Model Name	Sales Name
Multimedia Speaker	EDF100120	M90
Remote	EDF920001	RC500B

5. The object of the declaration described above is in conformity with the relevant Union harmonisation legislation directive and Other Union harmonisation legislation where applicable:

Radio Equipment Directive 2014/53/EU
RoHS Directive

6. References to the relevant harmonised standards or the common specifications used or references to the other technical specifications in relation to which conformity is declared:

Radio Equipment Directive	EN 300328 V 2.2.2:2019; EN 301489-1 V 2.2.3:2019; EN 301489-17 V 3.3.1:2024; EN 55032:2015+A11; EN 55035:2017+A11; EN IEC 61000-3-2:2019+A1; EN 61000-3-3:2013+A2; EN 62479:2010; EN 62368-1:2014+A11
RoHS Directive	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment, 2011/65/EU Annex II and its amendment Directive (EU) 2015/863 as well as RoHS harmonized standard EN IEC 63000: 2018.

7. EU Authorized Representatives Details:

Name: THEMIS AR Unterstützung UG **Contact Person:** Christopher Jones

Address: Beedstrasse 54, In Dusseldorf, (40468), Deutschland **E-mail:** legal@themisar.com

Signature: 

Printed name: Li Lanqiang

Position: Certification Center manager

Place and date of issue: DongGuan 2026-1-22

For the bundled battery

Name	Location	Model	Trademark	Ratings
Alkaline Manganese Dioxide-Zinc Battery	Remote control	LR03	EXCELL	1.5V

Fujian Nanping Nanfu Battery Co., Ltd.

NANFU

EU DECLARATION OF CONFORMITY

No: DoC-EXCELL-20240320

According to: REGULATION (EU)2023/1542 Regulation on Batteries and Waste Batteries

Brand: EXCELL Brand Owner: Fujian Nanping Nanfu Battery Co., Ltd.

Battery Classification: Portable Batteries | Alkaline Manganese Dioxide-Zinc Battery

Battery Category: ☒LR03 ☒LR6 ☒LR14 ☒LR20 ☐LR8D425 ☒6LR61

Battery Models: EXCELL LR03, EXCELL LR6, EXCELL LR14, EXCELL LR20, EXCELL 6LR61

Batch/Serial No.: Varies with expiry date and traceability code

This declaration of conformity is issued under the sole responsibility of the manufacturer.

Manufacturer's Name: Fujian Nanping Nanfu Battery Co., Ltd.

Address/Zip Code: 109 Industry Road, Yanping District, Nanping, Fujian, P.R.C., 353000

Phone: +86-13850900860

Fax: +86-8735117

Website: www.nanfu.com

Email: juan.shen@nanfu.com

EU REP's Name: Apex CE Specialists GmbH

Address/Zip Code: Grafenberger Allee 277, 40237 Düsseldorf, DE / 40237

Contact Person: Wells Yan

Email: Info@apex-ce.de

The following harmonized standards or technical specifications (designations) which comply with good engineering practice in safety matters in force within the EEA have been practiced:

(EU) 2023/1542	EU Battery Regulation
2006/66/EC	EU Battery Directive
(EU) 1907/2006 ANNEX XVII	REACH Regulation - ANNEX XVII
IEC 60086-1	Primary batteries – Part 1: General
IEC 60086-2	Primary batteries – Part 2: Physical and Electrical Specification
IEC 60086-5	Primary batteries – Part 5: Safety of Batteries with aqueous electrolyte

The notified body: ☐ YES ☒ N/A

The notified body name: /

The notified body address: /

The notified body number: /

The certificate(s): /

By signing this document, the undersigned declares under the sole responsibility as manufacturer, or the manufacturer's authorized representative established within the EEA, that the equipment in question complies with the requirements stated above.

Signed for and on behalf of: Fujian Nanping Nanfu Battery Co., Ltd.

(place and date of issue): Nanping/Fujian, 2024/3/20

(name, function) (signature): Shen Juan / Product Manager