

LogiLink®



USB 3.2 Gen 1 to VGA Adapter with PD

Art. No.: UA0259

The USB-C™ to VGA Charging Adapter lets you connect your MacBook or Chromebook from a USB-C™ port to a VGA display, while also connecting a standard USB-C™ charging cable.


This Adapter allows you to mirror your MacBook display to your VGA-enabled TV or monitor up to 1080p HD; it also outputs video content like movies and captured video.

Simply connect the adapter to the USB-C™ port on your MacBook or Chromebook and then to your TV or projector via a VGA cable (sold separately).

You can also connect a charging cable to the USB-C™ port to charge your MacBook or Chromebook.

Features:

- » Support USB-C™ input and VGA output
- » Supports DisplayPort 1.2 Alt-mode
- » Supports VGA resolution up to 1920 x 1200 @60Hz
- » Supports both video and audio output
- » USB-C™ female port supports USB Power Delivery Profile 4 up to 60W (20V/3A)
- » Supports simultaneous charging to your MacBook or Google Chromebook, or any other USB-C™ supported devices
- » Easy to use and carry

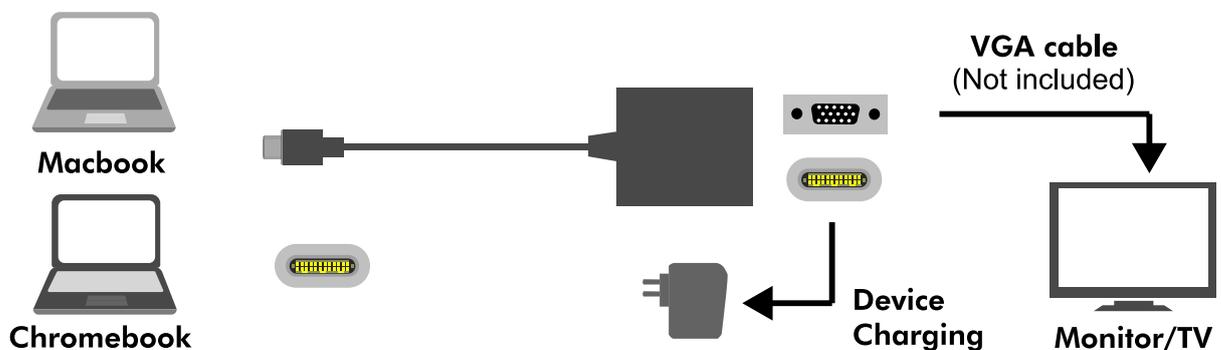

RoHS
compliant



*Specifications are subject to change without prior notice.
*USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum.
*All trade names referenced are the registered trademark of their respective owners.



UA0259



4 052792 038729

Made in China

LogiLink®



USB 3.2 Gen 1 to VGA Adapter with PD

Art. No.: UA0259

Specification:

Input	1x USB-C™ Male 1x USB-C™ Female for charging
Output	1x VGA Female
VGA Resolutions	Up to 1920 x 1200 @60Hz
VGA per Lane Data Rates	5.4 Gbps (HBR2), 2.7 Gbps (HBR) and 1.62 Gbps (RBR)
USB-C™ Standard	USB 3.1 Gen1 (Thunderbolt™ 3 compatible)
Operating Temperature	0°C - 45°C
Operating Humidity	10 - 85% RH (no condensation)
Storage Temperature	-10°C - 70°C
Storage Humidity	5 - 90% RH (no condensation)
USB-C™ Female Charging Port	USB PD Profile 4 Source up to 60W (20V/3A)
Product Dimension	59.1x40.2x14.4 mm
Product Weight	30 g
Cable Length	14 cm

Compatible Devices:

Apple	2015 MacBook 2016 MacBook 2016 MacBook Pro
Dell	XPS 13
Google	Chromebook Pixel
HP	Elite x2 1012 G1 Pro Tablet 608
Samsung	900X5L-K01



Package Contents:

- » 1x USB 3.2 Gen 1 to VGA Adapter with PD
- » 1x User Manual

Package Informations:

- » Packing Dimension: 202x139x25 mm
- » Packing Weight: 0.085 kg
- » Carton Dimension: 520x366x 85 mm
- » Carton Q'ty: 40 pcs
- » Carton Weight: 4.2 kg

⚠ Proper use of the PD function can only be guaranteed in combination with certified USB cables with E-Mark chipset.

*Specifications are subject to change without prior notice.

*USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum.

*All trade names referenced are the registered trademark of their respective owners.



UA0259



4 052792 038729

Made in China



RoHS
compliant





EC-Declaration of Conformity

According to the regulations
2014/30/EU(EMC) & 2011/65/EU (RoHS)

We, Importer / Distributor

2direct GmbH
Langenstück 5
58579 Schalksmühle
Germany

Declare that the product

Brand Name: **LogiLink**
Model Number: UA0259
USB3.1 Adapter, USB Type C to VGA w/PD adapter

Is in Conformity with the following European Standards:

EN 55022:2010+AC:2011
EN55024:2010
EN50581:2012

Report No: EA1512020E 01001

Identification of signatory empowered to bind the manufacturer or his authorized representative.

Schalksmühle, 30th June 2016

Place and date of issue



2direct GmbH
Langenstück 5
D-58579 Schalksmühle

Signature (Wilfried Grohnert)
Tel.: +49-2351-66887-0
Fax: +49-2351-66887-29