

3 Main Features

Standards		IEEE802.3 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3az, IEEE802.3ab
Network Media (Cable)		10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) 100BASE-Tx: UTP category 5, 5e cable (maximum 100m) 1000BASE-T: UTP category 5e, 6 cable (maximum 100m)
Number of Ports		5 x 10/100/1000Mbps Auto-Negotiation ports
LED	Link/Act	10M/100M: Green 1000M: Amber
	Power	Green
Transfer Method		Store-and-Forward
Switching Capacity		10Gbps
MAC capacity		2K
Frame Filtering and Forward Rate		10Mbps: 14880pps 100Mbps: 148800pps 1000Mbps: 1488000pps
Dimensions		140*78*28 mm (L x W x H)
Environment		Operating Temperature: 0°C - 40°C Storage Temperature: -10°C - 70°C Operating Humidity: 10%~90% non-condensing Storage humidity: 5%~90% non-condensing
Power Supply Consumption		Input: DC 5V /1A(adapter) Consumption: 2.75W

CE Mark Warning

This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

EU declaration of conformity

Cudy hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC and 2011/65/EU. The original EU declaration of conformity may be found at <http://www.cudytech.com/en/ce>

For support and warranty, please visit: <http://www.cudytech.com/>. Specifications are subject to change without notice. Cudy is a registered trademark of Shenzhen Cudy Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright©2019 Shenzhen Cudy Technology Co., Ltd. All rights reserved.



RoHS
Made in China



cudy


Quick Installation Guide

5-Port 10/100/1000Mbps Switch


Model: GS105

810600023

1 Physical Connection

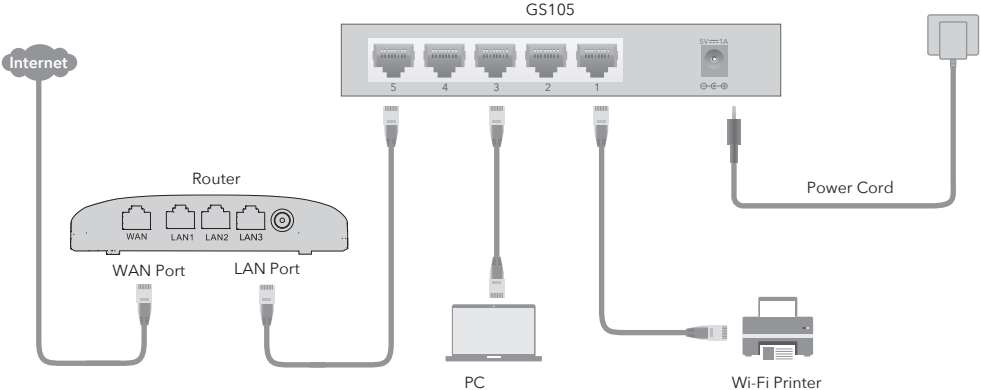

2 LED Indication



 Power	On	Power on	
	Off	Power off	
 Link / Act	On	Green	10/100M device connected
		Amber	1000M device connected
	Flash	Green	10/100Mbps Tx/Rx is in process
		Amber	1000Mbps Tx/Rx is in process
	Off	No device connected	